

DMRM 系列干插拔橡塑水密连接器

产品特性

- 干插拔连接器类型
- 2 种规格尺寸
- 插头与电缆橡胶模塑一体
- 插座采用增强高分子材料注塑
- 电流传输，信号传递
- 较经济型



应用领域

- 水下照明
- 水下通讯
- ROV 系统
- 声呐系统
- 潜水设备

技术参数

- 耐压:70Mpa
- 标称电压:300VDC
- 工作温度:-4℃~60℃

材料

- 插头:氯丁橡胶
- 插座:增强高分子材料接
- 触件:铜合金镀金
- 电缆:氯丁橡胶护套或聚氨酯护套电缆



标配电缆载流表(A)

型号	电缆线号 (AWG)	载流 (A)
RMG-2	1#10	1x50
	1#14	1x23
RMG-3	1#10	50
	2#14	2x23
RMG-4	1#14	1-23
	3#16	3-15
RMG-5	1#14	1-23
	4#16	4-15
RMG-6	1#14	1-23
	5#16	5-15
RMK-2	1#10	1-50
	1#14	1-23
RMK-3	1#10	1-50
	2#14	2-23
RMK-4	1#10	1-50
	3#14	3-23
RMK-5	1#10	1-50
	4#14	4-23
RMK-6 (7, 8, 9, 12)	1#14 5 (6、7、8、11) #16	1-23 5 (6、7、8、11) -15




DMRM 系列干插拔橡塑水密连接器命名规则


DMXS	DMRM 系列插座标识	G	3	MP
DMRM	系列插头标识			
G、K	壳体规格			
1,2,3,4,5,6 接触件数量(堵头缺省)				
MP	插针型插头			
FS	插孔型插头			
BCL	插孔型插座			
FLS	母锁紧帽			
MLS	公锁紧帽			




DMRMG MP/FS 外形尺寸

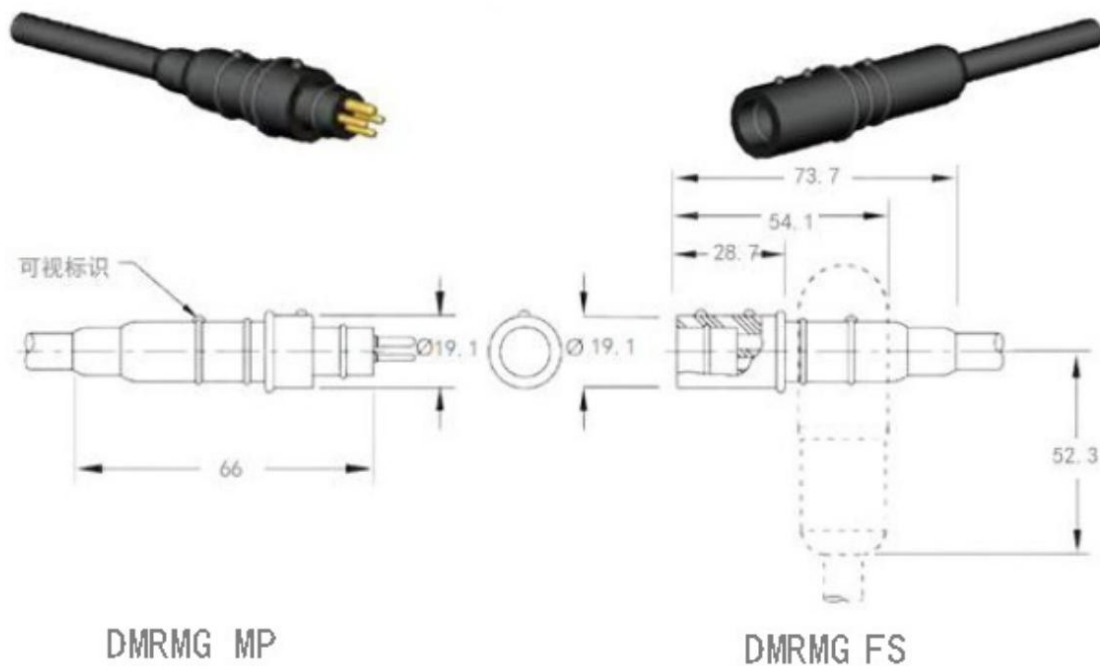


DMRMG FS 接点排列

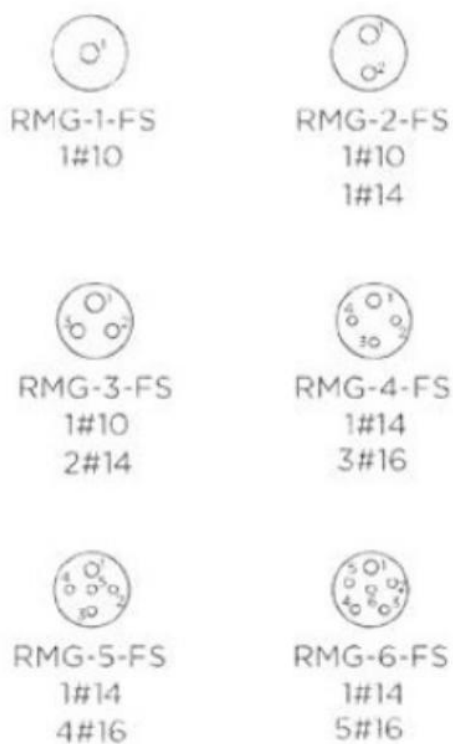


DMXSG BCL 外形尺寸

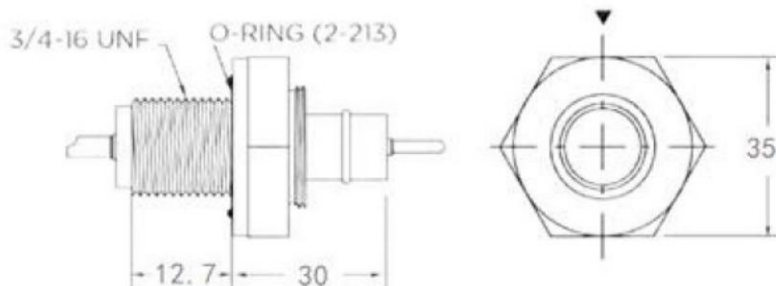

DMXSG BCL 接点排列

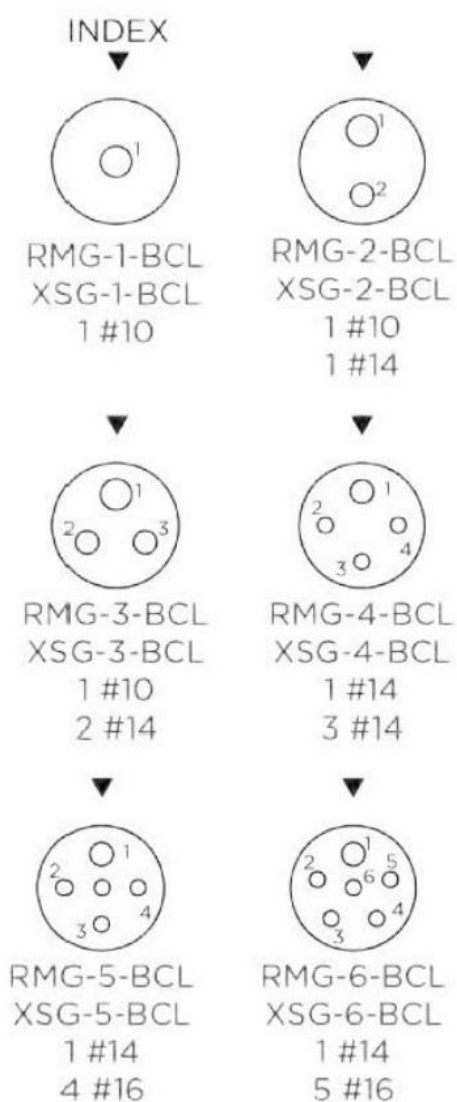

DMRMK MP/FS 外形尺寸

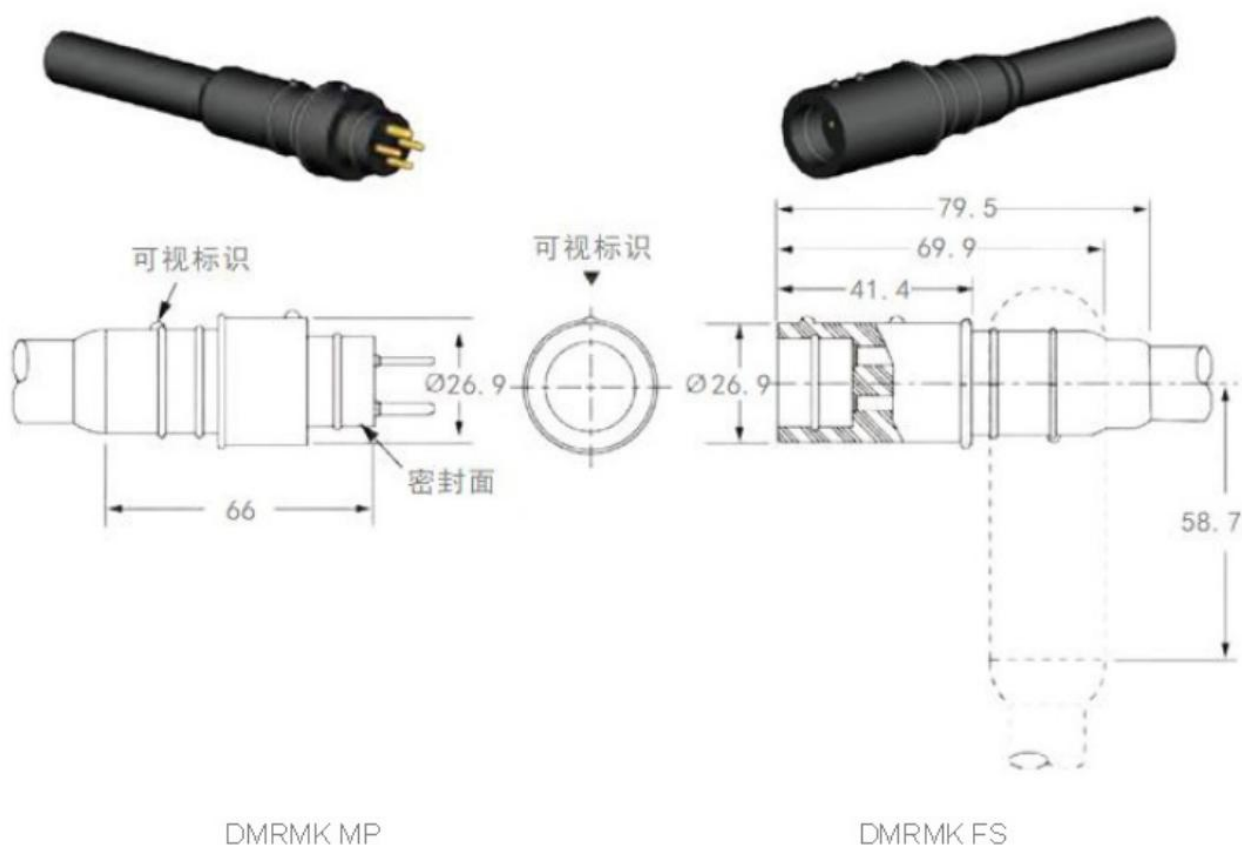


DMRMK MP


DMRMK FS











DMRMK FS 接点排列

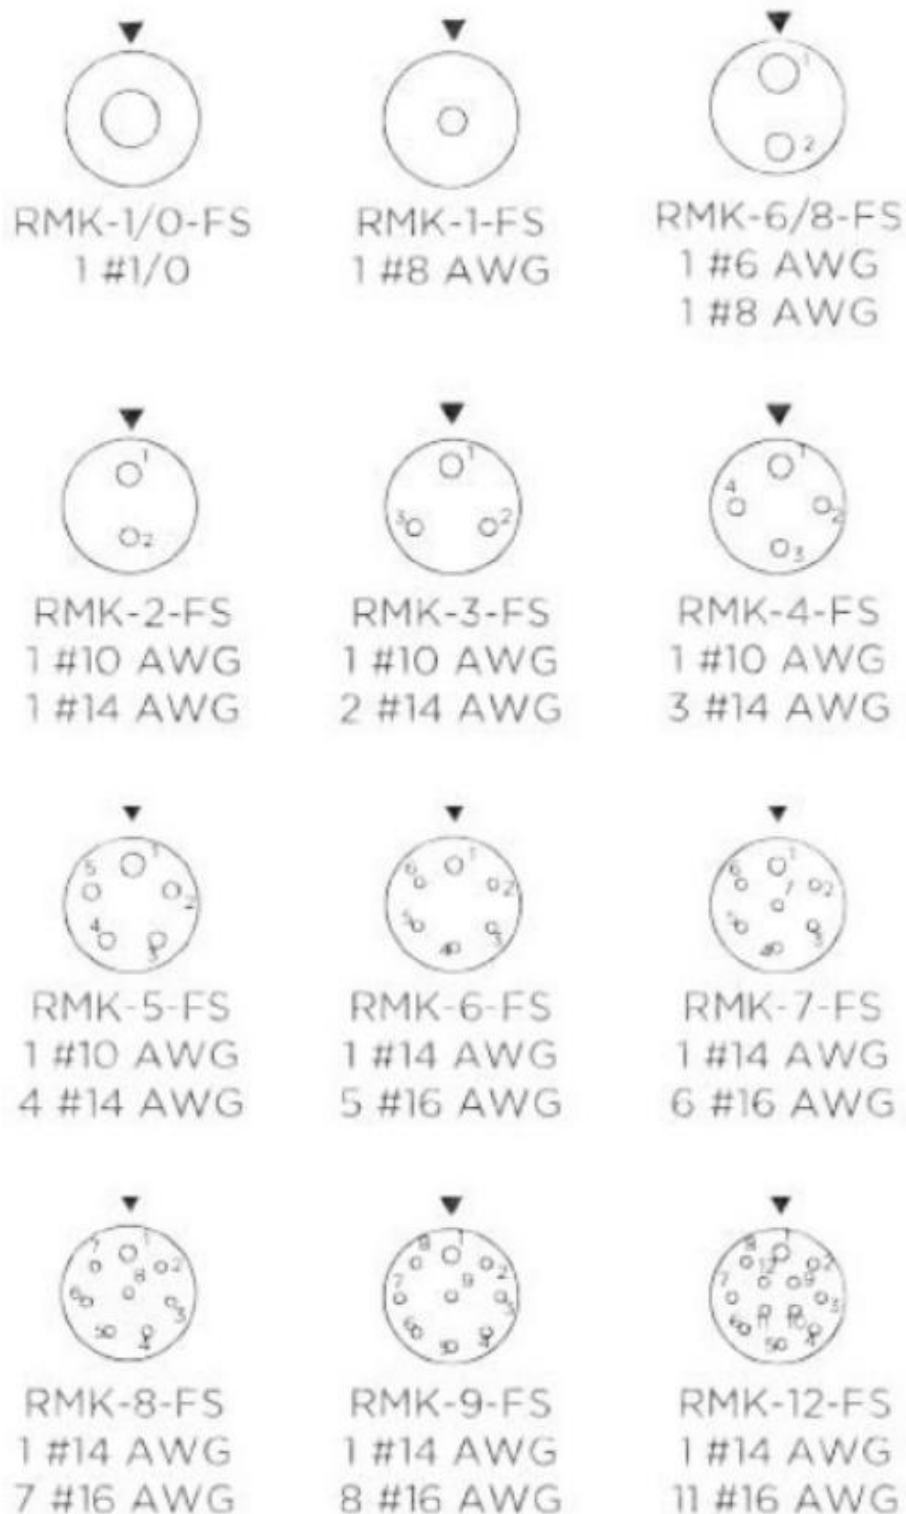


DMXSK BCL 外形尺寸

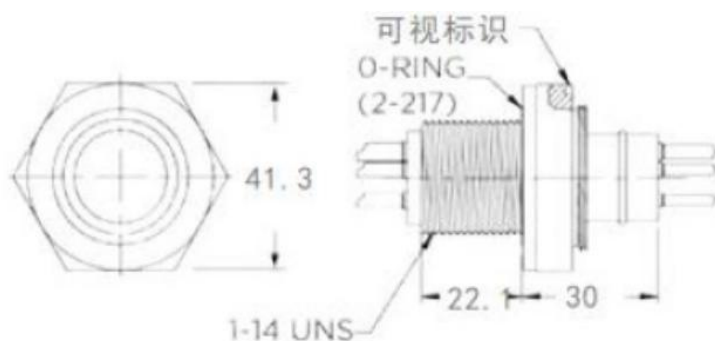

DMXSK BCL 接点排列




DMRMG MLS 公锁紧帽/FLS 母锁紧帽/外形尺寸

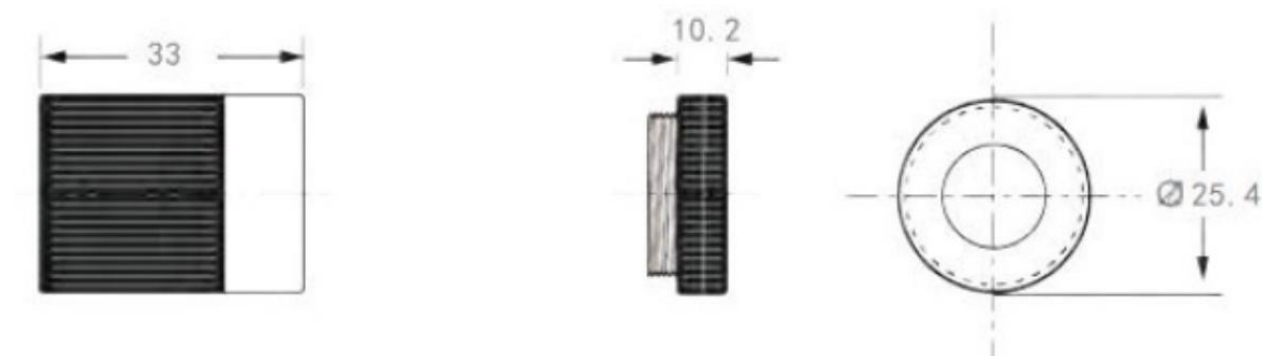

DMRMG FLS

DMRMG MLS

DMRMK MLS 公锁紧帽/FLS 母锁紧帽/外形尺寸

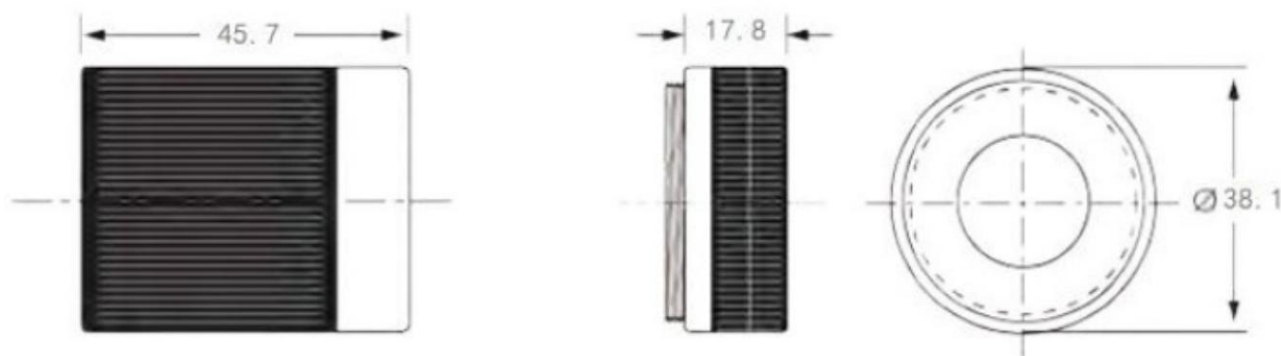

DMRMK FLS

DMRMK MLS

